


IP65 二相混合式防水步进电机 (SIZE 86mm-1.8°)



电机规格参数 (Motor Specifications)

| 型号(Model) | 电流 | 电阻@20℃ | 电感@1kHz | 保持力矩 | | 惯量 | 机身長 | 重量 | |
|-------------|---------|-------------------|---------------|----------------|-------|--------------------|--------|--------|-----|
| | Current | Resistance | Inductance | Holding torque | | Inertia | Length | Weight | |
| | A | $\Omega \pm 10\%$ | mH $\pm 20\%$ | N.m | OZ.in | kg/cm ² | mm Max | Kg | Lbs |
| 34IP290-02 | 3.0 | 1.3 | 12.0 | 4.5 | 637 | 1.8 | 88 | 2.1 | 4.6 |
| 34IP290-03 | 4.5 | 0.6 | 6.0 | 4.5 | 637 | 1.8 | 88 | 2.1 | 4.6 |
| 34IP290-04 | 6.0 | 0.3 | 3.5 | 4.5 | 637 | 1.8 | 88 | 2.1 | 4.6 |
| 34IP2130-02 | 3.0 | 2.1 | 25.7 | 8.5 | 1204 | 3.6 | 126 | 3.6 | 7.9 |
| 34IP2130-03 | 4.5 | 0.9 | 11.8 | 8.5 | 1204 | 3.6 | 126 | 3.6 | 7.9 |
| 34IP2130-04 | 6.0 | 0.5 | 6.5 | 8.5 | 1204 | 3.6 | 126 | 3.6 | 7.9 |

外形图 (Dimensions)

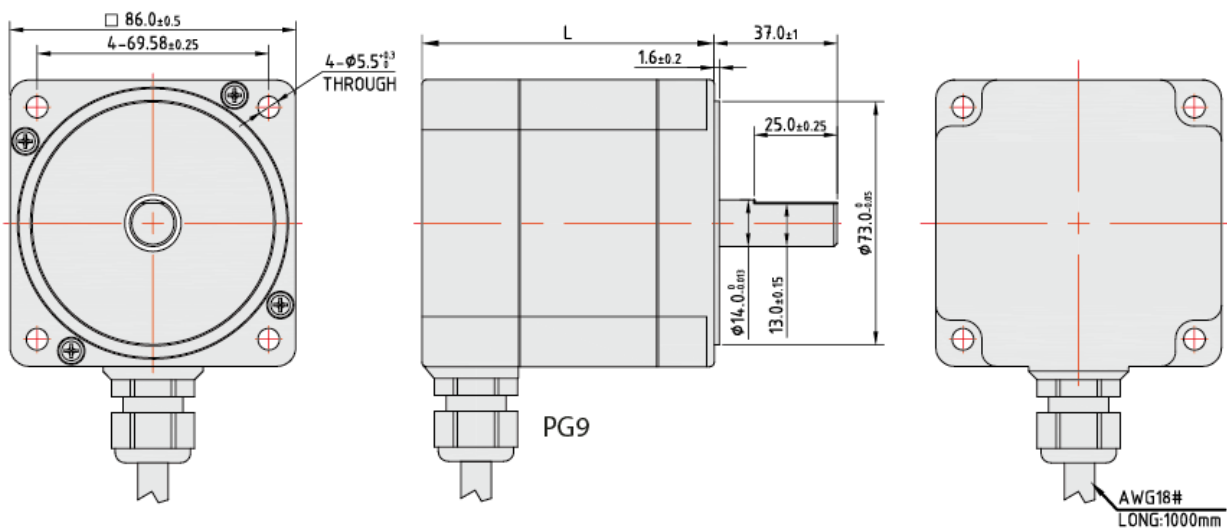

短频曲线 (Torque-frequency Curve)

